

Spirent **GSS7765**

Interference Simulation System

Key Features

- Fully supported in SimGEN™ scenarios
- Full control over interference signal content and dynamics
- Wide range of interference types
- Large power and frequency range
- Modelled and static operating modes
- Interactive mode enables power and modulation to be controlled in real-time
- Multiple configurations
- Compatible with embedded jamming (where available on the underlying system)
- Up to 4 fully independent interference sources supported

The GSS7765 Interference Simulation System, when combined with one of Spirent's GNSS satellite constellation simulators, offers a comprehensive solution for testing satellite navigation equipment in the presence of intentional or unintentional RF interference.

The GSS7765 package comprises one or more high quality commercial signal generators plus an Interference Combination Unit (ICU). The package is supported by Spirent's SimGEN™ software suite.

The GSS7765 offers a very broad range of interfering signal options, which may be used to represent a varied array of threat sources. Interference signals available include Continuous Wave (CW), AM, FM, some of which may be pulsed. The generator also supports noise generation with variable bandwidth.

The GSS7765 can be configured to support up to 4 fully independent interference sources by the addition of extra generators to the single-source base configuration.

The SimGEN™ software supports three operating modes. Fixed mode allows a scripted series of events to be defined, while Modelled mode allows the user to position interference sources in the scenario and model the level effects as the simulated vehicle moves within the specified environment. Interactive mode enables the interference source power level and modulation characteristics to be controlled in real-time.



Specification

Output Frequency

- All signal types 500MHz to 2GHz
- Resolution 0.01Hz
- Stability $\leq \pm 1$ ppm per year
 $\leq \pm 1$ ppm typical over 0 to 55°C

May also be frequency locked to an external standard of 1,2 or 10MHz

Signal Quality

- Harmonics < -30 dBc
- Non-harmonics < -48 dBc
- Sub-harmonics < -76 dBc

Signal Level at Generator Output

- Noise -169 to -23 dBW
- Other signals -166 to -20 dBW
- Resolution 0.02 dB

Interference/Signal Ratios (via ICU)

Relative to GPS L1P signal at -163 dBW

- Noise -16 to $+130$ dB
- Other signals -13 to $+133$ dB
- Modulation types
 - CW
 - Stepped-CW 2 to 65535 steps, 0.1ms to 100s dwell time
 - AM 0 to 90% in 0.1% steps, sine, square, ramp, triangle rate 0.1Hz to 10kHz (sine 50kHz), 0.1Hz steps
 - FM 20MHz max, 0.1% steps, sine, square, ramp, triangle rate 0.1Hz to 10kHz (sine 50kHz), 0.1Hz steps
 - NOISE 1Hz to 48MHz bandwidth, 0.1Hz steps
 - PULSE On/Off ratio > 80 dB
Rise/Fall < 50 ns (typ)
Period 2μ s to 42s

Connections

- RF Output (ICU and generators) Type N female co-axial

Size (HxWxD approx)

- Generators 133 x 426 x 432mm
(5.25 x 16.8 x 17inch)
- ICU 133 x 426 x 200mm
(5.25 x 16.8 x 7.9inch)

Weight

- Generators < 13.5 kg (28lb)

Configurations




- 1 to 4 generators, plus ICU

Product Specifications (MS3055/MS3008) are available on request

Performance figures and data in this document are typical and must be specifically confirmed in writing by Spirent Communications plc. before they become applicable to any particular order or contract.

The publication of information in this document does not imply freedom from patent or other rights of Spirent Communications plc. or others.

For current product data, visit the Spirent websites at www.spirent.com/positioning or www.spirentfederal.com

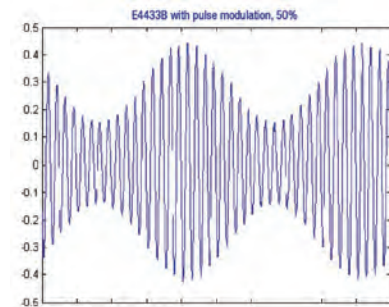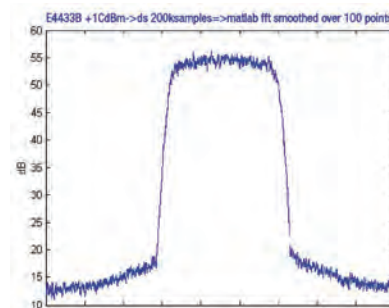

Contact Us

For more information, call your Spirent sales representative or visit us on the web at

www.spirentfederal.com

© 2018 Spirent Communications, Inc. All of the company names and/or brand names and/or product names and/or logos referred to in this document, in particular the name "Spirent" and its logo device, are either registered trademarks or trademarks pending registration in accordance with relevant national laws. All rights reserved. Specifications subject to change without notice.

Americas 1-800-SPIRENT
+1-800-774-7368 | sales@spirent.com

US Government & Defense
info@spirentfederal.com | spirentfederal.com

Europe and the Middle East
+44 (0) 1293 767979 | emeainfo@spirent.com

Asia and the Pacific
+86-10-8518-2539 | salesasia@spirent.com